

VALOISTE - PORVOO LED



230V/50Hz

1. Dimensions:

Power [W]	L [mm]	B[mm]	W [mm]	Weight [kg]
57	1200	Smooth adjustment	100	3,25
71	1500	Smooth adjustment	100	3,80
140	3000	Smooth adjustment	100	7,80

2. Assembly:

- Turn off the power at electrical circuit to which is to be connected luminaire.
- Install suspension of luminaire (according to the instructions suspension).
- Remove the luminaire from the package.
- Remove the end caps the luminaire as in Fig.1.
- Slide the suspension on the first shelf profile as in Fig.2.
- Install regulators rope or chain (depending on the version of the suspension) as in Fig.3.
- Thread the cable through the regulators (version suspension on the ropes).
- Connect the power cable according to with the indications as in Fig.4.
- If a single luminaire (version OPAL) cut bowl as in Fig.7.
- Attach the end caps luminaire as in Fig.5.

3. Assembly in line:

- Follow the steps a-g of paragraph 2 for every luminaire.
- To connect the the two beams together slide in the first beam central connector and two side connector, then tighten the marked fixing screws as Fig.6.
- Slide the second beam on the connectors and tighten the screws.
- Connect plugs of through wiring.
- After assembly line attach ends caps as in Fig.5.
- Plug the power supply to one of the luminaires in the line as markings as in Figure 4.

4. Important warnings:

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws caused by avoid using this manual.

Manufacturer reserves a right to change the construction of the product.

Do not assembly in places without air circulation.

To guarantee safety of luminaire functions, please assembly according to instruction.

The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law. More details of directive available at: <http://www.gios.gov.pl>

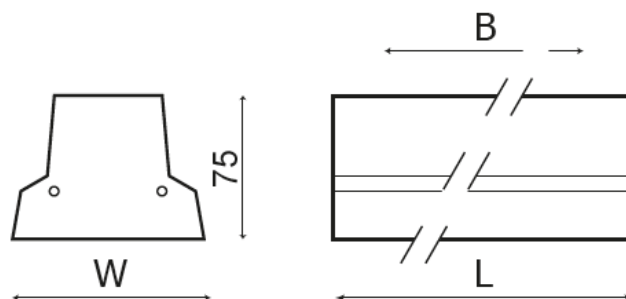



Fig.1.

Fig.2.

Fig.3.






Fig.4.

Fig.5.





Fig.6.

Fig.7.

