
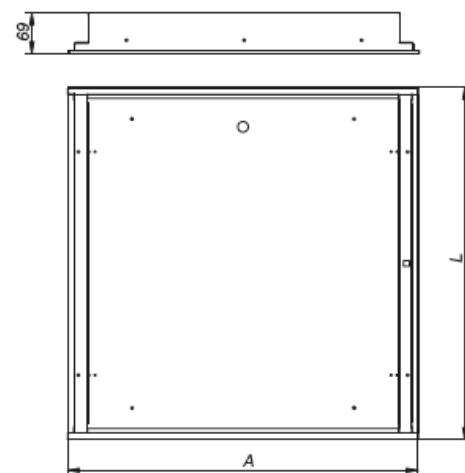


VALOISTE - RANUA IP65 LED

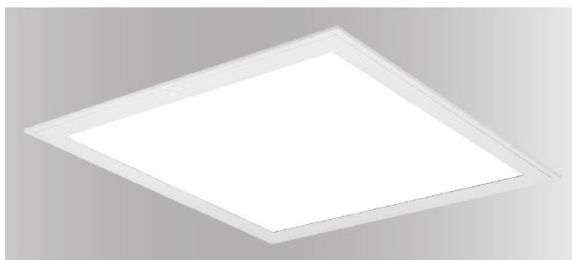

230V/50HZ LED


1. Dimensions

Moc [W]	L	A	H	Weight*	Installation hole	
41/106	596	596	69	6,1/6,1/7,9kg	575	575
48	1196	296	69	8,6/8,6/10kg	1175	275
51	596	596	69	5,8kg PAR	575	575
41 CLIP-IN	600	600	69	6,5/6,5/8,4kg	Not applicable	
51 CLIP-IN	600	600	69	6,2kg PAR	Not applicable	

*OPAL/MPRM/SH

2. Installation:

- carefully take the luminaire out of the package and put it on a stable surface (e.g. floor, table),
- open the luminaire with a screwdriver,
- connecting power supply:
 - push the gland into the feeding cable hole in the base of the luminaire,
 - pull the feeding cable through the gland,
 - connect the wires as indicated on the power terminal,
- put the luminaire on the grid of the modular ceiling, mount it in the hole in the plaster cardboard ceiling or clip it into the grid of Clip-in Ceiling system:
 - cut out a hole with the dimensions given in the table (plaster-cardboard ceiling only),
 - put the luminaire into the hole and, turning the mounting screws, push the mounting brackets outside, which, as they go out, will clamp the luminaire against the ceiling,
- attach the lines securing the frames,
- attach the protection wire to the frame (if it was detached earlier),
- put the frame on and tighten the screws to close the luminaire.



3. Important warnings:

- Luminaires may be installed by qualified registered personnel only.
- Any manipulation inside the luminaire when the power is activated causes the risk of electric shock.
- The manufacturer is not responsible for any flaws resulting from non-compliance with these instructions.
- The manufacturer reserves the right to change the construction of the product.
- Do not install the luminaire in places without sufficient air circulation.
- To guarantee safe luminaire functioning, please follow the instructions in the installation instructions.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remind obligations towards separate collection. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting to the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

